


Counterweight Frames

Hollister-Whitney can supply the counterweight frame as a separate unit or supply the counterweight frame and filler weights. Each counterweight frame is furnished with top and bottom channels, "T" bar side stiles, two tie rods, and cable hitch plate. Hanger assembly is also available for 2:1 roping.

Note: If filler weights are supplied by customer, H-W will supply filler weight drawings. Frame width can be varied to suit any D.B.G.* dimension. Estimating the amount of weights required is based on the total net car weight plus 40% to 50% of capacity minus frame weight.

FRAME NO.	STD D.B.G.*	SHIPPING WEIGHT
260	27 1/2"	400 Lbs.
240	30 1/8"	410 Lbs.
230	38 3/4"	430 Lbs.
250	57 1/4"	480 Lbs.
255	66 3/4"	575 Lbs.

* D.B.G. is the distance between guide rails.

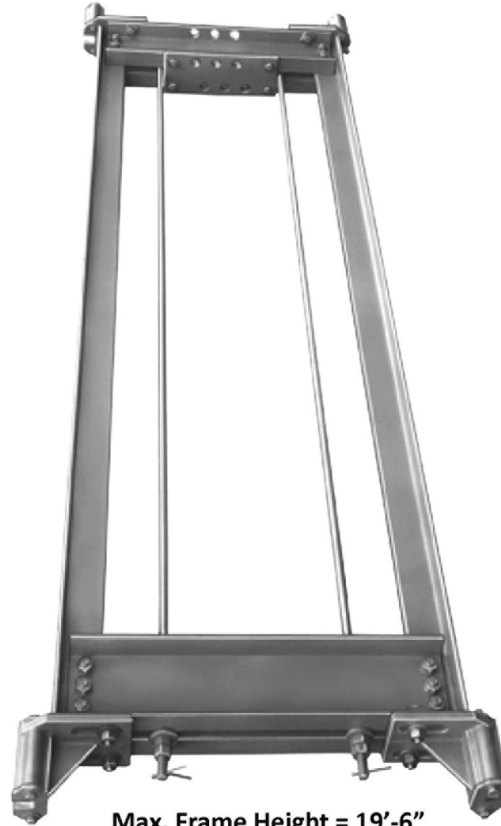

Max. Frame Height = 19'-6"

When Ordering Counterweight Frame and Guard, Please Specify the Following:

- D.B.G. • Maximum Overall Height of Frame • Maximum Width of Filler Weights (*Minimum is 5"*)
- Total Counterweight Required • Number and Size of Hoist Ropes

Note: Hollister-Whitney Guide Shoe Assemblies #375, #376, #377, and #383 will mount on above standard counterweight frames without requiring mounting plates. All other guide shoes require mounting plates (*Drilling instructions are required if Hollister-Whitney is to furnish mounting plates, but not shoes*).