

ENGINEERING CONTACT: _____
 COMPANY: _____
 EMAIL: _____
 FAX NO: _____

JOB NAME: _____
 ELEV. #: _____ H-W #: _____
 FROM (H-W): _____
 DATE: _____

**INFORMATION REQUIRED TO MANUFACTURE
 SMALL COMPONENTS**

SAFETIES


- EMPTY CAR WEIGHT: _____
- CAPACITY: _____
- COMPENSATION WEIGHT(IF APPLICABLE): _____
- CAR SPEED: _____
- FACE TO FACE OF GUIDE RAILS: _____
- RAIL SIZE (IN LBS.): _____
- GOVERNOR LOCATION (SHOW ON SKETCH "D")
- STILE SIZE: _____

FILL OUT SHOE AND PLATES SECTION IF ADAPTOR PLATES ARE REQUIRED

**ENGINEERING INFORMATION:
 WE REQUIRE ALL MARKED ITEMS
 AND FILL IN ANY BLANK FIELDS
 ASSOCIATED WITH THOSE ITEMS**


GOVERNORS

- CAR SPEED: _____
- MOUNTING LOCATION: STANDARD OVERHEAD MOUNTING PIT MOUNTED OPTION
- SHEAVE DIA (ROPE DIA): 12" (3/8") 16" (3/8") 16" (7/16") 16" (1/2")
- GOVERNOR PULL-THRU (IN LBS.): _____
- HAND OR LOCATION (SHOW ON SKETCH "D")
- LIVE SHAFT DIAMETER: N/A 12mm 0.25" 0.75" 1.00"
- ACCESSORIES: RESETTABLE NEMA SWITCH: _____
 ENCLOSURE MOUNTING PLATE

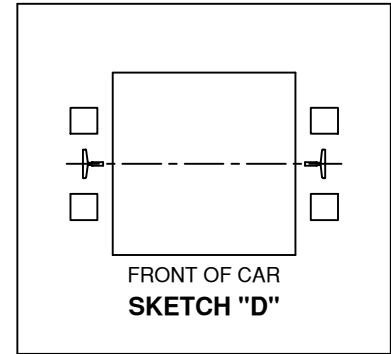

TENSION WEIGHTS

- RAIL SIZE (IN LBS.): _____
- SHEAVE DIA (ROPE DIA): 12" (3/8") 16" (3/8") 16" (7/16") 16" (1/2")
- TENSION WEIGHT TYPE: FRAME SWING

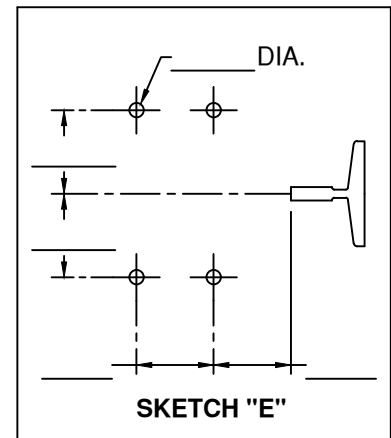

SHOES AND PLATES

- SHOE TYPE: _____ MANUFACTURER: _____
- RAIL SIZE (IN LBS.): _____
- TEMPLATE (FILL IN ALL DIMENSIONS ON SKETCH "E")

ROPE GRIPPERS

- EMPTY CAR WEIGHT: _____
- CAPACITY: _____
- COMPENSATION WEIGHT (IF APPLICABLE): _____
- CAR SPEED: _____
- ROPING: 1:1 2:1
- HOIST ROPES: QUANTITY _____ SIZE _____
- OUT-TO-OUT OF HOIST ROPES (SEE SKETCH "F" - DIM. "FF"): _____
- LENGTH OF HYDRAULIC HOSE REQUIRED:
 STANDARD (27")
 4'-0" 5'-0" 6'-0" 8'-0" CUSTOM (UP TO 30'-0"): _____

